


# DAKLUX® ECO

The DAKLUX® ECO is a roof window designed for uninhabited roofspaces. With its integrated flashing and user-friendly installation procedure, this skylight is a perfect solution for those dark spaces to create more light at a very affordable price.

The product can be installed in all roofing materials; this includes all slates and tiles with a height profile from 0-90 mm. The flexible system allows installation in roofs with pitches above 15 degrees.

# DAKLUX®

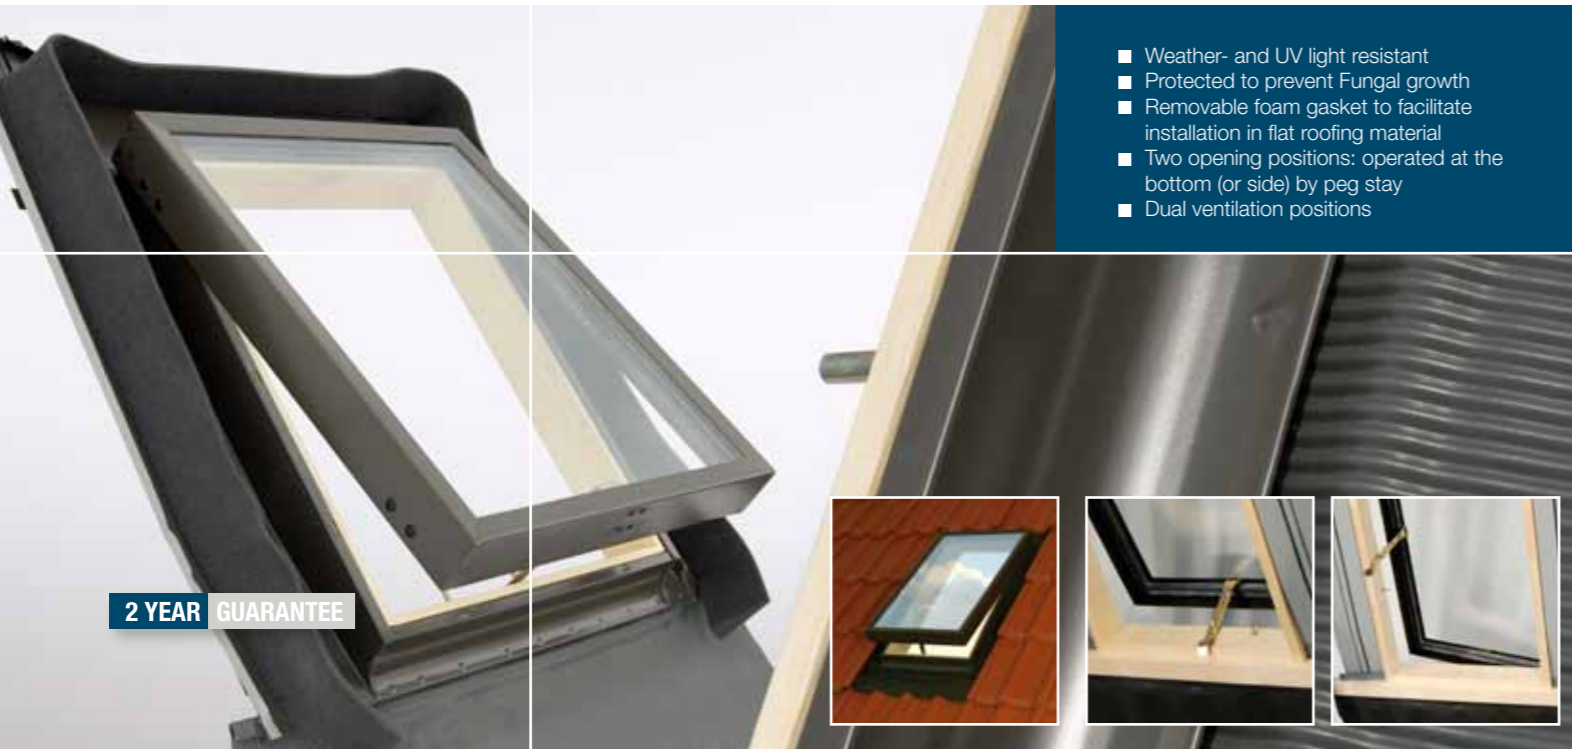

- Weather- and UV light resistant
- Protected to prevent Fungal growth
- Removable foam gasket to facilitate installation in flat roofing material
- Two opening positions: operated at the bottom (or side) by peg stay
- Dual ventilation positions

2 YEAR GUARANTEE

**Decra Roof Systems Ltd.**  
Unit 4, Crompton Fields,  
Crompton Way,  
Crawley, West Sussex,  
RH10 9QB  
United Kingdom  
Tel: +44(0)1293 545058  
Fax: +44(0)1293 562709  
E-mail: sales@decra.co.uk  
[www.decra.co.uk](http://www.decra.co.uk)

**Decra Ireland**  
ECS House,  
Willsborough IE,  
Clonsborough,  
Dublin 17  
Eire  
Tel: +353(0)1 867 0600  
E-mail: sales@decra.ie  
[www.decra.ie](http://www.decra.ie)

| ROOF WINDOW MEASURES |              |           |          |               |        |                      |
|----------------------|--------------|-----------|----------|---------------|--------|----------------------|
| CODE                 | NOMINAL SIZE | PANE SIZE |          | VISIBLE GLASS |        | EFFECTIVE LIGHT AREA |
|                      |              | Width     | Height   | Width         | Height |                      |
| DVXC2A               | 55 x 78 cm   | 39,8 cm   | 64,9 cm  | 37,3 cm       | 59 cm  | 0.220 m <sup>2</sup> |
| DVXF6A               | 66 x 118 cm  | 50,8 cm   | 104,9 cm | 48,3 cm       | 99 cm  | 0.478 m <sup>2</sup> |
| DVXM4A               | 78 x 98 cm   | 62,8 cm   | 84,9 cm  | 60,3 cm       | 79 cm  | 0.476 m <sup>2</sup> |
| DVXM6A               | 78 x 118 cm  | 62,8 cm   | 104,9 cm | 60,3 cm       | 99 cm  | 0.597 m <sup>2</sup> |

| COMPATIBILITY TABLE |                    |               |                |                |              |              | SKYLIGHT   |
|---------------------|--------------------|---------------|----------------|----------------|--------------|--------------|------------|
| CODE                | UNIVERSAL FLASHING | TILE FLASHING | SLATE FLASHING | BLACKOUT BLIND | ROLLER BLIND | AWNING BLIND | SIZE       |
| DVXC2A              | UFXC2A             | TFXC2A*       | SFXC2A*        | RURC2A         | RARCXA       | MIRCXA       | FE4573     |
| DVXF6A              | UFXF6A             | TFXF6A*       | SFXF6A*        | RURF6A         | RARFXA       | MIRFXA       |            |
| DVXM4A              | UFXM4A             | TFXM4A*       | SFXM4A*        | RURM4A         | RARMXA       | MIRMXA       |            |
| DVXM6A              | UFXM6A             | TFXM6A*       | SFXM6A*        | RURM6A         | RARMXA       | MIRMXA       | 45 x 73 cm |

\*Available only by ordering.



Natural light is fundamental to the quality to our lives and living environments.

# DAKLUX®

Manufactured in pine from managed resources, the Daklux® centre-pivot roof window range is a high quality product, carrying a 10 year guarantee. These roof windows have a slim wood profile, which gives an excellent interior design and allows up to 10% more daylight into your room. The argon-filled pane gives an outstanding U-value of 1,1 W/m²K. The windows are equipped with specially designed ventilation to enhance your well-being.

## Installation

Installation of Daklux® roof windows is based on acknowledged methods, which makes it easy and safe to install the window. You will find an easy-to-use textless installation instruction included with every roof window. Even more details, step-by-step installation images and videos are available on [www.daklux.com](http://www.daklux.com)

### SELECTED PINE

### INERT GAS-FILLED PANE

### QUALITY MANUFACTURING

### CLEAN DESIGN

### OPTIMUM VENTILATION

### ELEGANT HANDLE

### EASY INSTALLATION

### EXCELLENT INSULATION

#### Wood and finish

The knot-free wood has a clear coat of water-based acrylic lacquer, which gives it a natural appearance.

#### Raw materials

Products are manufactured only from top quality raw materials and all wood has been sourced from sustainable and certified resources (PEFC).

#### Quality

Windows have been independently tested for energy performance, water tightness and sound reduction. All windows carry a 10 year guarantee.

#### Manufacturing

Production uses the latest and most innovative technologies and the factory is ISO 9001 certified.

#### Ventilation

All windows are equipped with a ventilation, living up to building requirements.

#### Pane

The argon-filled pane gives outstanding U-value of 1.1 (whole window value = 1.5). It is a 100% watertight solution, based upon installation principles that have stood the test of time.

#### Handle

The window is bottom operated with a high quality handle made from moulded zinc. The handle has dual opening positions which allows more ventilation.

#### Operation

The roof window is centre hung, which makes it easy to clean it on the outside.

#### Flashing

Flashings ensure an easy and safe installation of your window. They are available for all types of tile and slate.



Internal and external blinds are available to fit DAKLUX® roof windows. They are designed to be easy to use and easy to install, there is no cutting or adjustment needed. Step-by-step instruction included. All blinds are covered by a 2 year guarantee.